


LED EXIT AND EMERGENCY LIGHT COMBO

CHICAGO APPROVED



**RED LETTERS ON WHITE
BACKGROUND**

**CEILING, WALL OR SIDE
MOUNTING**

**STEEL HOUSING
CONSTRUCTION**

**90-MINUTE BATTERY
BACKUP RUNTIME**

**TEST SWITCH AND
AC SUPPLY INDICATOR**

SUGGESTED APPLICATIONS

Commercial & Industrial,
Garages, Retail, Schools,
Hospitals

SATCO|NUVO's Chicago Approved LED Exit & Emergency Light Combo Fixtures provide dependable emergency egress illumination in one space-saving solution. A premium frosted glass face with bold red 6-inch EXIT lettering is paired with durable steel construction and two adjustable LED emergency light heads to help direct light where it is needed most. Universal wall, ceiling, and end mounting options simplify installation, while the integrated emergency battery backup, push-to-test button, and AC power indicator provide reliable operation during power outages. These fixtures are UL 924 certified, damp location rated, and designed to meet Chicago code requirements. Optional Single and Double Face directional arrow panel kits are sold separately to accommodate a variety of installation requirements.



GENERAL SPECIFICATIONS

Input Voltage: 120-277V

Frequency: 50/60Hz

Power Factor: >0.4

THD: <130%

Emergency Backup: Yes

Emergency Duration / Run Time: 90 Minutes

Recharge Time: 24 Hours

Battery Push to Test Button: Yes

Battery Type: LiFePO4

Letter Height: 6"

Letter Color: Red

Face Type: Single

Directional Arrow: Directional Panel Kits sold separately

Housing Construction / Finish: Steel / Gloss White

Lens Material / Finish: Glass / Frosted

Mounting Options: Universal

Location Rating: Damp

Ambient Operating Temperature: +41°F to +113°F (+5°C to +45°C)

Warranty: 2 Year



ITEM SPECIFICATIONS / ORDER INFO

Item	Product Code	Wattage	CCT	Input Current @120/277V	Lumens	Number of Lamp Heads	Remote Capable
67-310	EXC/WH/U/BB/CH	6.5W	5700K	0.05-0.02A	810L	2	No
67-311	EXC/WH/U/BB/RC/CH	6.5W	5700K	0.05-0.02A	810L	2	Yes

DIMENSIONS / WEIGHTS


Item	Width (A)	Height (B)	Depth (C)	Weight
67-310	12.09"	13.29"	2.86"	7.28 Lbs.
67-311	12.09"	13.29"	2.86"	7.28 Lbs.

NOMENCLATURE



1-Product Family (EXC=Exit Sign/Emergency Light Combo)
 2-Housing Color (WH = White)
 3-Input Voltage (U=120-277V)
 4-Battery Backup

5-Remote Capable (Blank=No support, RC=Remote Capable)
 6-City of Code (CH=Chicago)

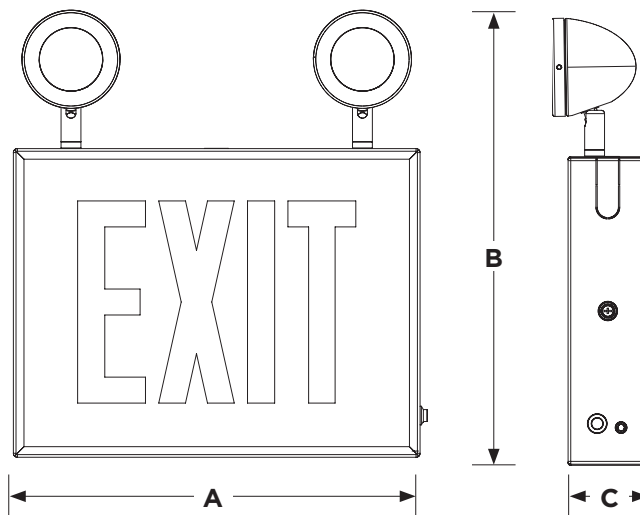

FEATURES



Red Lettering
Single Face



Test Switch & Power
Supply Indicator



Ceiling Wall or Side
Mount Capable



Two Adjustable LED
Light Heads

OPTIONAL ACCESSORIES

Item	Compatible with 67-310 & 67-311	
67-320	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; No Arrows	
67-321	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Right Direction Arrow	
67-322	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Left Direction Arrow	
67-323	Exit Sign Panel Accessory; White Glass Panel; Red EXIT Signage; Double Direction Arrow	
67-324	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; No Arrows	
67-325	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Right Direction Arrow	
67-326	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Left Direction Arrow	
67-327	Exit Sign Panel Accessory; White Glass Panel; Red STAIR Signage; Double Direction Arrow	
67-330	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; No Arrows	
67-331	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; One Panel Has Right Direction Arrow; The Other Panel Has A Left Direction Arrow	
67-332	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red EXIT Signage; Double Direction Arrows	
67-333	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; No Arrows	
67-334	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; One Panel Has Right Direction Arrow; The Other Panel Has a Left Direction Arrow	
67-335	Exit Sign Double-Sided Panel Kit Accessory; Two White Glass Panels; Red STAIR Signage; Double Direction Arrows	
Item	Compatible with 67-311	
67-395	Remote Emergency Light; Chicago Approved; White Housing; Single Head; 6 Vdc 1.5 W	
67-396	Remote Emergency Light; Chicago Approved; White Housing; Dual Head; 6 Vdc 3.0 W	

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Meets requirements of ICES-005 issue 5 Class B for use in residential and commercial applications.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.