


LED EDGE-LIT EXIT SIGNS

CHICAGO APPROVED | SURFACE MOUNT



**RED LETTERS ON WHITE
BACKGROUND**

**FROSTED ACRYLIC SINGLE
FACE OR DOUBLE FACE**

**CEILING, WALL OR
SIDE MOUNTING**

**90-MINUTE BATTERY
BACKUP RUNTIME**

**TEST SWITCH AND AC
SUPPLY INDICATOR**

SUGGESTED APPLICATIONS

Commercial & Industrial,
Garages, Retail, Schools,
Hospitals

SATCO|NUVO's Chicago approved LED Edge-Lit Exit Signs combine a sleek, modern appearance with dependable emergency performance for Chicago code-compliant installations. Available in single and double face models, these fixtures feature an edge-lit acrylic panel with bold red 6-inch EXIT lettering, universal mounting for wall, ceiling, or end installations, and a durable white steel housing. Integrated battery backup provides 90 minutes of emergency illumination during power outages, while a push-to-test button and AC power indicator simplify routine maintenance. Designed for 120-277V operation, UL 924 certified, and damp location rated, these fixtures deliver reliable exit marking for commercial, institutional, and public spaces. Optional Single and Double Face directional arrow panel kits are sold separately to accommodate a variety of applications.



GENERAL SPECIFICATIONS

Input Voltage: 120V-277V
Frequency: 50/60Hz
Power Factor: >0.4
THD: <130%
Emergency Backup: Yes
Emergency Duration / Run Time: 90 Minutes
Recharge Time: 24 Hours
Battery Push to Test Button: Yes
Battery Type: LiFePO4
Letter Height: 6"

Letter Color: Red
Directional Arrow: Directional Panel Kits sold separately
Housing Construction / Finish: Steel / Gloss White
Lens Material / Finish: Acrylic / Frosted
Mounting Options: Universal
Location Rating: Damp
Ambient Operating Temperature: +41°F to +113°F (+5°C to +45°C)
Warranty: 2 Year




ITEM SPECIFICATIONS / ORDER INFO

Item	Product Code	Wattage	Input Current @120V/277V	Face Type
67-340	EXE/WH/U/BBS/CH	4W	0.03-0.01A	Single
67-341	EXE/WH/U/BBD/CH	4W	0.03-0.01A	Double

DIMENSIONS / WEIGHTS

Item	Width (A)	Height (B)	Depth (C)	Weight
67-340	14.06"	11.54"	1.61"	3.68 Lbs.
67-341	14.06"	11.54"	1.61"	3.68 Lbs.

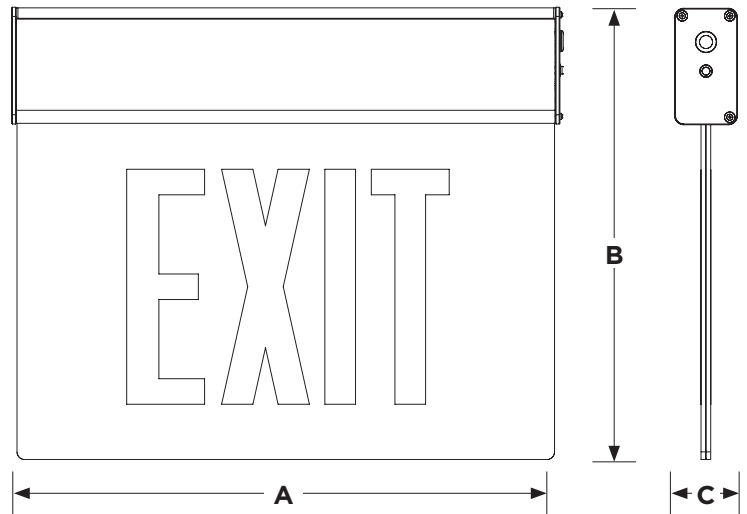

NOMENCLATURE



1-Product Family (EXE=Exit Sign Edgelit)
 2-Housing Color (WH = White)
 3-Input Voltage (U=120-277V)
 4-Battery Backup
 5-Single or Double Face (S=Single, D=Double)
 6-City of Code (CH=Chicago)

FEATURES



Red Lettering



Test Switch & Power Supply Indicator



Universal Mounting Kit

OPTIONAL ACCESSORIES

Item	Compatible with ALL SKUS (67-340 to 67-341)	
67-360	Edge Lit Exit Sign Panel Accessory; White Single-Face Plastic Panel; Red EXIT Signage; No Arrows	
67-361	Edge Lit Exit Sign Panel Accessory; White Single-Face Plastic Panel; Red EXIT Signage; Right Direction Arrow	
67-362	Edge Lit Exit Sign Panel Accessory; White Single-Face Plastic Panel; Red EXIT Signage; Left Direction Arrow	
67-363	Edge Lit Exit Sign Panel Accessory; White Single-Face Plastic Panel; Red EXIT Signage; Double Direction Arrow	
67-364	Edge Lit Exit Sign Panel Accessory; White Single-Face Plastic Panel; Red STAIR Signage; No Arrows	
67-365	Edge Lit Exit Sign Panel Accessory; White Single-Face Plastic Panel; Red STAIR Signage; Right Direction Arrow	
67-366	Edge Lit Exit Sign Panel Accessory; White Single-Face Plastic Panel; Red STAIR Signage; Left Direction Arrow	
67-367	Edge Lit Exit Sign Panel Accessory; White Single-Face Plastic Panel; Red STAIR Signage; Double Direction Arrow	
67-370	Edge Lit Exit Sign Double-Sided Panel Accessory; White Double-Face Plastic Panel; Red EXIT Signage; No Arrows	
67-371	Edge Lit Exit Sign Double-Sided Panel Accessory; White Double-Face Plastic Panel; Red EXIT Signage; Right/Left Direction Arrows	
67-372	Edge Lit Exit Sign Double-Sided Panel Accessory; White Double-Face Plastic Panel; Red EXIT Signage; Double Direction Arrows	
67-373	Edge Lit Exit Sign Double-Sided Panel Accessory; White Double-Face Plastic Panel; Red STAIR Signage; No Arrows	
67-374	Edge Lit Exit Sign Double-Sided Panel Accessory; White Double-Face Plastic Panel; Red STAIR Signage; Right/Left Direction Arrows	
67-375	Edge Lit Exit Sign Double-Sided Panel Accessory; White Double-Face Plastic Panel; Red STAIR Signage; Double Direction Arrows	

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Meets requirements of ICES-005 issue 5 Class B for use in residential and commercial applications.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.