

DUAL HEAD SECURITY LIGHTS

BULLET HEADS | STANDARD & MOTION SENSOR MODELS



65-1410



65-1413

SATCO|NUVO

**DIE-CAST ALUMINUM
CONSTRUCTION**

**120-277V UNIVERSAL
VOLTAGE INCLUDING
MOTION SENSOR MODELS**

**FULLY ARTICULATING &
LOCKABLE HEADS**

**CCT SELECTABLE
3000/4000/5000K**

**STANDARD AND MOTION
SENSOR MODELS WITH
DUSK-TO-DAWN OPTIONS**

SUGGESTED APPLICATIONS

Walkways
Driveways
Garages
Sheds
Patios

SATCO|NUVO's Dual Head Security Lights deliver dependable outdoor illumination for residential and commercial applications. Available in traditional bullet head designs, these fixtures feature selectable 3000K, 4000K, and 5000K color temperatures and are offered in black, white, and bronze finishes to complement a variety of exteriors. Constructed from rugged die-cast aluminum for lasting durability, the adjustable lamp heads articulate for precise aiming and lock securely into place. Available with or without an integrated motion sensor, every model operates on universal 120-277V input voltage, including sensor versions. Motion sensor models also function as dusk-to-dawn fixtures with convenient wall switch override, while the IP65-rated housing provides reliable protection against the elements.



GENERAL SPECIFICATIONS

Input Voltage: 120-277V
Frequency: 50/60Hz
THD: <20%
Dimmable: Non-Dimmable
Surge Protection Rating: 2kV
CCT Selectable: 3000K/4000K/5000K
Wattage: 20W
Max. Replacement Wattage: 200W
Input Current @ 120V/277V: 0.18-0.08A

Beam Angle: 110°
Efficacy: Up to 145 LPW
CRI: 80+
Location Rating: Wet
IP Rating: IP65
Ambient Operating Temperature: -40°F to +122°F (-40°C to +50°C)
Housing Material: Die-Cast Aluminum
Rated Life Hours: 50,000 Hours
Warranty: 5 Year

MOTION SENSOR SPECIFICATIONS

Motion Sensor Type: PIR
Detection Range: Up to 60 feet
Detection Angle: 180°

Time Setting: 10 Seconds to 10 Minutes
Dusk to Dawn Feature: Yes
Manual Override Available: Yes

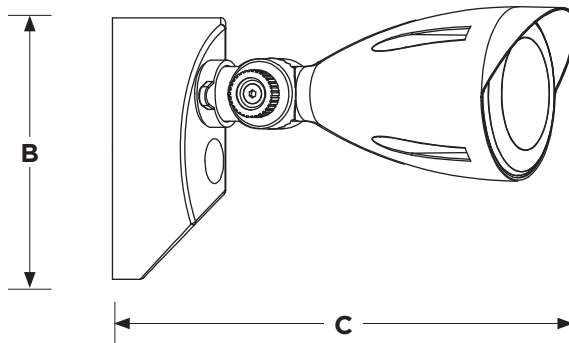
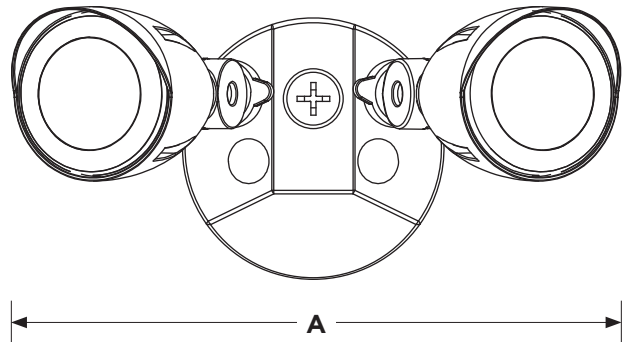
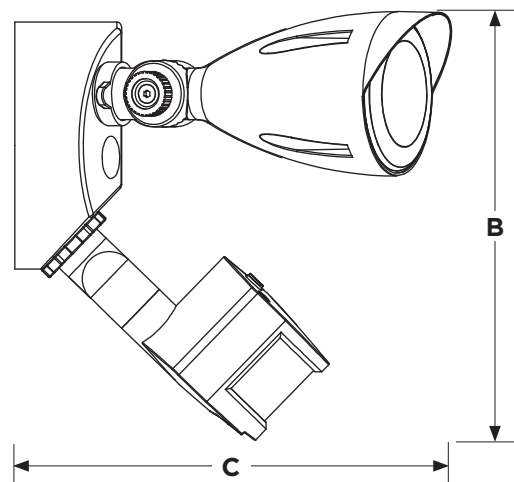
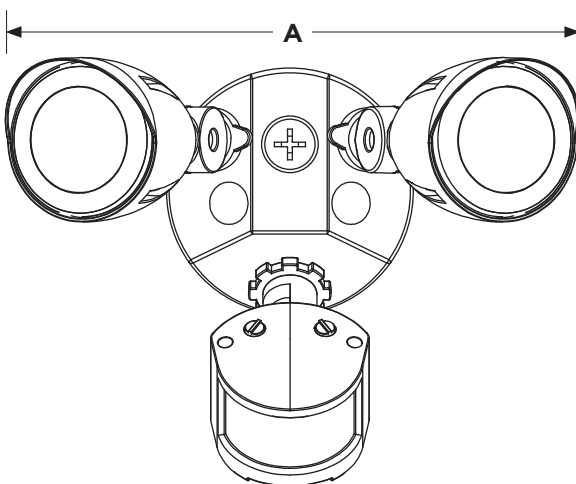
ITEM SPECIFICATIONS / ORDER INFO



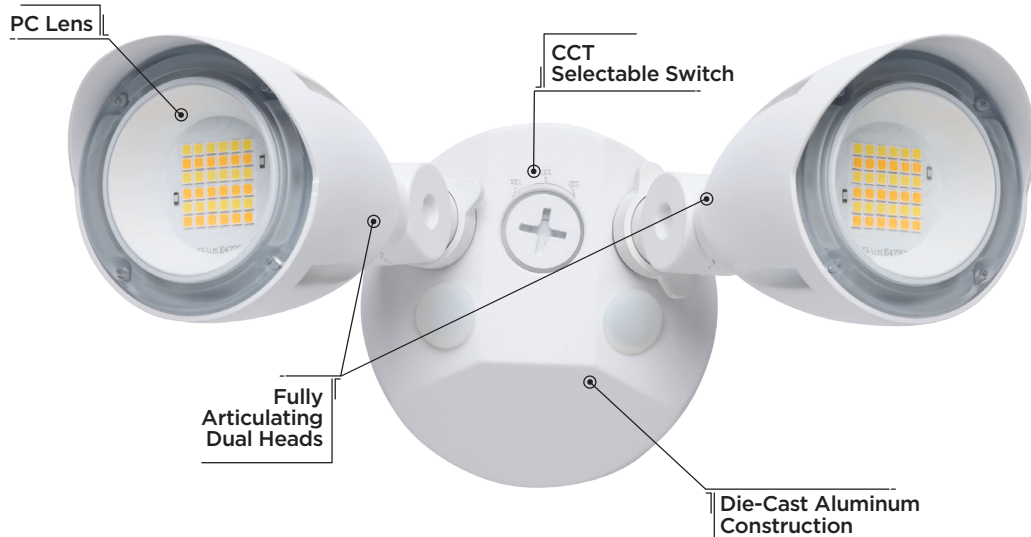
Item	Lumens	Housing Color	Lens Finish/Material	Head Shape	Mounting Options
STANDARD MODELS					
65-1410	2600/2700/2900	White	Polycarbonate/Clear	Bullet	Recessed and External J-Box Mount Wall/Eave
65-1412	2600/2700/2900	Bronze	Polycarbonate/Clear	Bullet	Recessed and External J-Box Mount Wall/Eave
65-1414	2600/2700/2900	Black	Polycarbonate/Clear	Bullet	Recessed and External J-Box Mount Wall/Eave
MOTION SENSOR MODELS					
65-1411	2600/2700/2900	White	Polycarbonate/Clear	Bullet	Recessed and External J-Box Mount Wall/Eave
65-1413	2600/2700/2900	Bronze	Polycarbonate/Clear	Bullet	Recessed and External J-Box Mount Wall/Eave
65-1415	2600/2700/2900	Black	Polycarbonate/Clear	Bullet	Recessed and External J-Box Mount Wall/Eave

DIMENSIONS / WEIGHTS

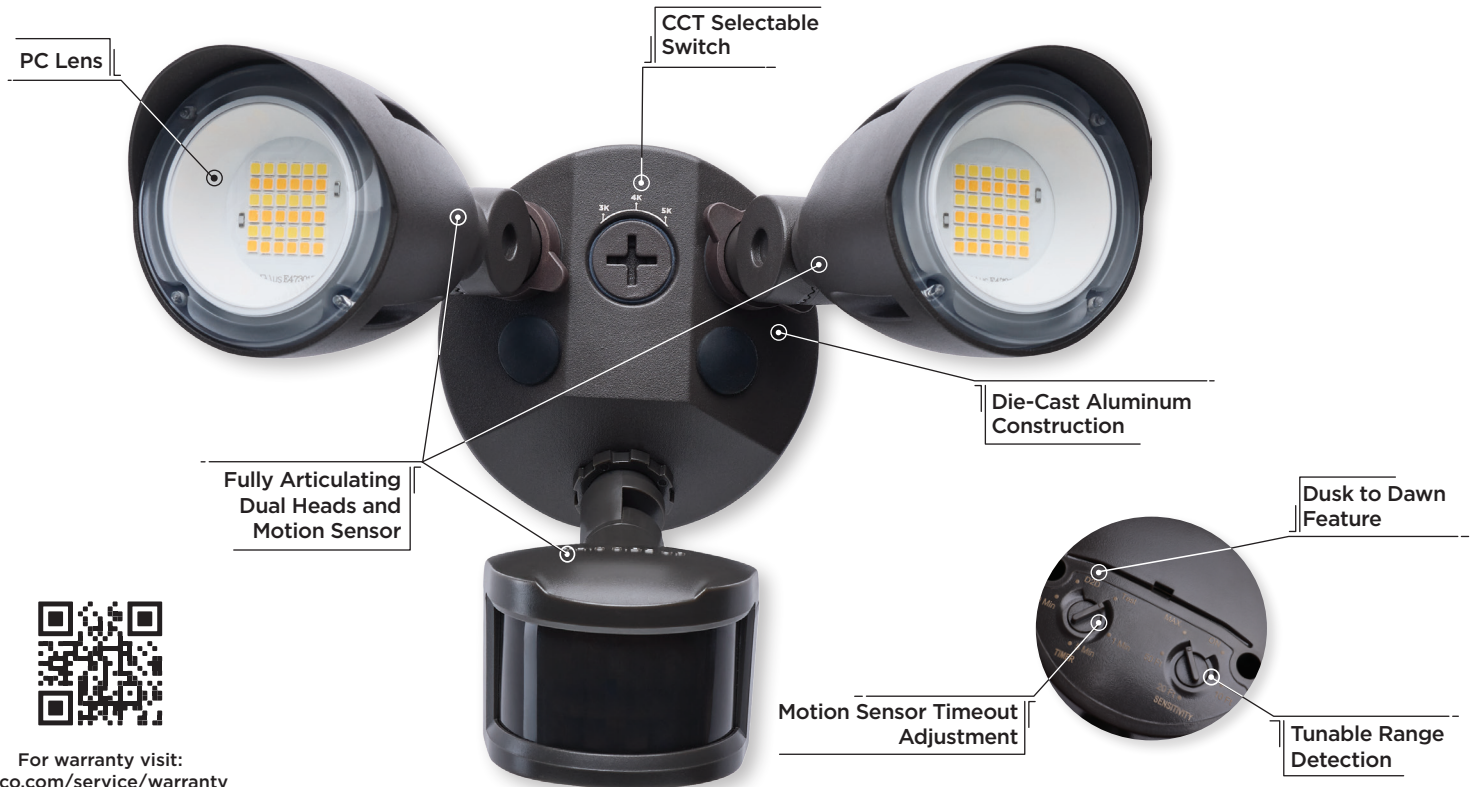
Item	Width (A)	Height (B)	Extends (C)	Weight
65-1410	9.61"	4.29"	7.32"	1.76 Lbs.
65-1411	9.61"	7.17"	7.32"	1.98 Lbs.
65-1412	9.61"	4.29"	7.32"	1.76 Lbs.
65-1413	9.61"	7.17"	7.32"	1.98 Lbs.
65-1414	9.61"	4.29"	7.32"	1.76 Lbs.
65-1415	9.61"	7.17"	7.32"	1.98 Lbs.

BULLET HEAD SECURITY LIGHT

BULLET HEAD SECURITY LIGHT WITH MOTION SENSOR


DUAL HEAD BULLET SECURITY LIGHT MODEL



DUAL HEAD BULLET SECURITY LIGHT MODEL



For warranty visit:
satco.com/service/warranty

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65. Please refer to your product packaging for more information.

Meets requirements of ICES-005 issue 5 class B for use in residential and commercial applications.

MIN 75°C SUPPLY CONDUCTORS.

IMPORTANT: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.

Specifications are subject to change without prior notice.