



LED PIVOT LIGHT



Shipped with Pre-packed Counter Display

SEARCH

Built for Directional, High-Output, and Distance Lighting



PIVOTING HEADS

DUAL LIGHT SOURCES

REPLACEABLE BATTERY

MAGNETIC MOUNT

KEY USE CASES

Inspection, Outdoor Navigation, Emergency Response

Designed for inspections, repairs, outdoor use, and emergency situations, the SATCO Recharge LED Pivot Light combines the power of a high-output search flashlight with the versatility of an integrated task light. The adjustable pivoting head directs light exactly where it's needed, while the magnetic base, removable pocket clip, and replaceable rechargeable battery provide dependable performance for professionals and everyday users alike.



GENERAL SPECIFICATIONS

PERFORMANCE

Max Lumens: 1,500lm
Light Output: Search: High 1,500lm / Low 800lm
 Task: High 800lm / Low 200lm
Beam Distance: 150m
Light Modes: Search & Task: High / Low / Strobe
Color Temperature: 6500K Daylight
Runtime: Up to 6.5 Hours
Charge Time: 3 Hours
Operating Temperature:
 +32°F to +104°F (0°C to +40°C)
Warranty: 1 Year

CONSTRUCTION

Housing Material: Aluminum
Lens Material: Polycarbonate (PC) / Glass
Finish: Black / Gray / Red
Pivot Head: Adjustable
Magnetic Base: Yes
Pocket Clip: Removable
Battery: 20650 Lithium-ion
Included Accessories:
 USB-A to USB-C Charging Cable

ELECTRICAL

Battery Voltage: 3.7V DC
Battery Chemistry: Lithium-ion
Charging Input: 5V DC
Charging Port: USB-C
Rechargeable: Yes
Dimming: Step Dimming
 (Mode Selection)
Replaceable Light Source: No

ITEM SPECIFICATIONS / ORDER INFO



Item	Finish	Max Lumens	Volts	Beam Distance	Run Time	Inner Qty	Case Qty
S30107	Black / Gray / Red	1,500lm	3.7V	150m	6.5 Hr	2 Shelf Displays (10 Each)	20

DIMENSIONS / WEIGHTS

Length (A)	Width (B)	Height (C)	Weight
1.6"	1.1"	6.3"	0.5 lbs

SHELF DISPLAY

Length (A)	Width (B)	Height (C)	Weight
5.6"	8.9"	12.1"	6.0 lbs

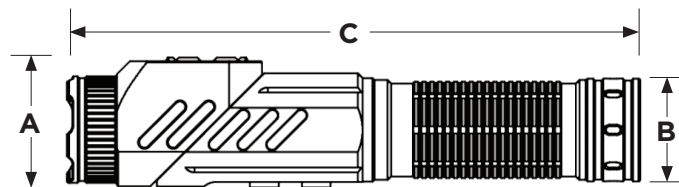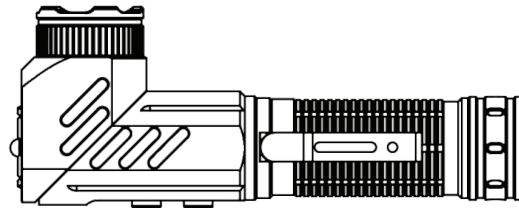

FEATURES



Dual On/Off Switches



Top Search Light



Front Task Light

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WARNING: Some products included in this specification sheet may be subject to the warning requirements of California's Proposition 65.

Please refer to your product packaging for more information.

Specifications are subject to change without prior notice.

Visit satco.com/service/warranty for complete warranty details.