



FIELD SELECTABLE

HIGH LUMEN OUTPUT

90+ CRI

**H-TRACK AND J-TRACK
MOUNTING**

SUGGESTED APPLICATIONS

Retail Stores
Grocery Displays
Warehouse
Wall Wash

SIDE MOUNT TRACK HEADS

H & J STYLE | FIELD SELECTABLE



TH6001
JH6001



TH6002
JH6002



SATCO|NUVO's Side Mount Track Heads deliver high output LED illumination for high ceiling applications. These track heads are available with both H and J-Track mounting options and are field selectable – meaning wattage and color temperature can easily be selected or changed in the field. The driver is mounted on the side of the fixture, allowing for 355° rotation from side to side and 350° up and down. Side Mount track heads offer 50, 40, and 30W options with a 60° beam spread. Five color temperatures are available 2700, 3000, 3500, 4000, and 5000K which can be easily selected using the switch on the driver compartment.

GENERAL SPECIFICATIONS

Input Voltage: 120V
Wattage: 50/40/30W
Lumens: 6100/5100/3990*
Input Current: 0.430A
Frequency: 60Hz
Power Factor: >0.9
THD: <20%
Efficacy: 110 LPW
CRI: 90+
CCT Selectable: 2700/3000/3500/4000/5000K

Beam Angle: 60°
Dimmable: Yes
Location Rating: Dry
IP Rating: IP20
Ambient Operating Temperature: -4F to +113F (-20C to +45C)
Construction: Aluminum / Polycarbonate (PC)
Lens Material: Glass
Functional Life: 50,000 Hours
Warranty: 3 Year

*Lumen Values at 4000K



ITEM SPECIFICATIONS / ORDER INFO

Item Number	Finish	Beam Angle
H-STYLE		
TH6001	White	60°
TH6002	Black	60°
J-STYLE		
JH6001	White	60°
JH6002	Black	60°

FEATURES




Horizontal & Vertical Aiming



H & J-Style Mounting



CCT & Wattage Switches

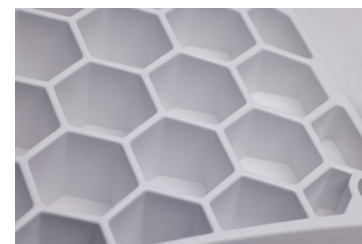

Improved Honeycomb Pattern for Passive Heat Dissipation

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.

CAUTION: CHANGES OR MODIFICATIONS NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

California Proposition 65 Warning: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Meets requirements of ICES-005 issue 5 class B for use in residential applications.

CAUTION: RISK OF ELECTRIC SHOCK. DO NOT USE IF OUTER LAMP ENVELOPE IS DAMAGED OR BROKEN. DO NOT USE WHERE DIRECTLY EXPOSED TO WATER.


- NOT FOR USE WHERE DIRECTLY EXPOSED TO WATER.
- DIMMABLE.
- NOT COMPATIBLE WITH PHOTO CONTROLS, OCCUPANCY SENSORS, OR TIMERS.
- THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS OR EMERGENCY LIGHTING.
- OPERATING TEMPERATURE RANGE: -4°F TO +113°F (-20°C TO +45°C).

For complete listing of compatible dimmers, visit www.satco.com




SATCO.COM | 800-437-2826

© Satco Products, Inc. All rights reserved. Rev. 9/26 SN2136



DIMENSIONS / WEIGHTS

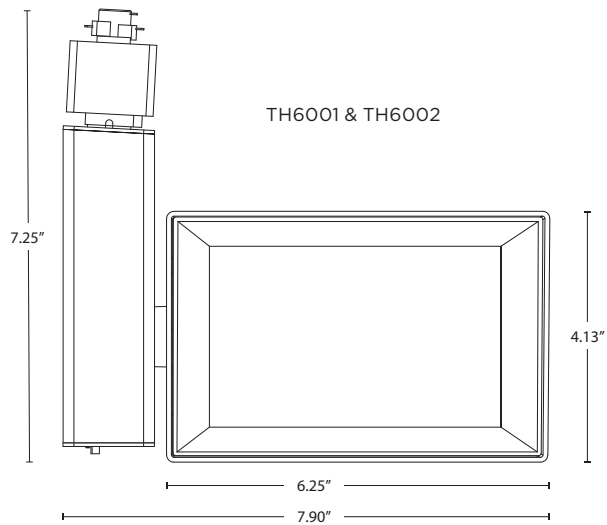

Weight: 2.74 Lbs

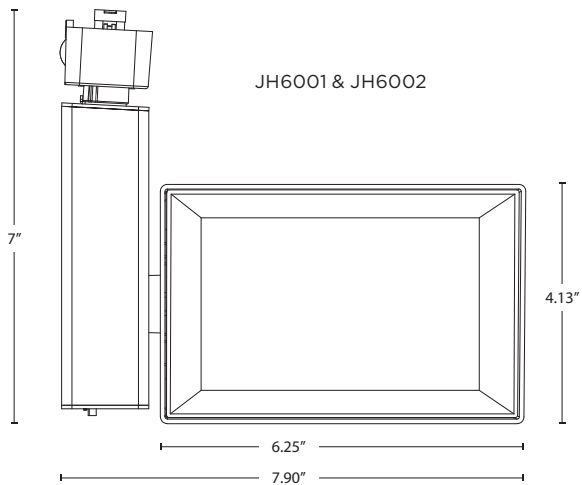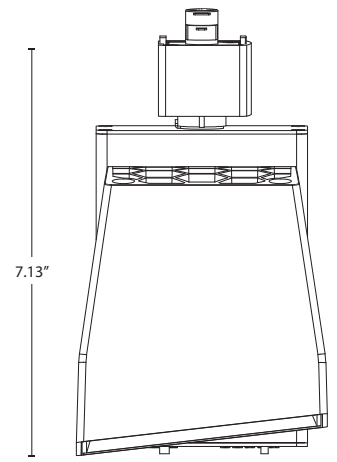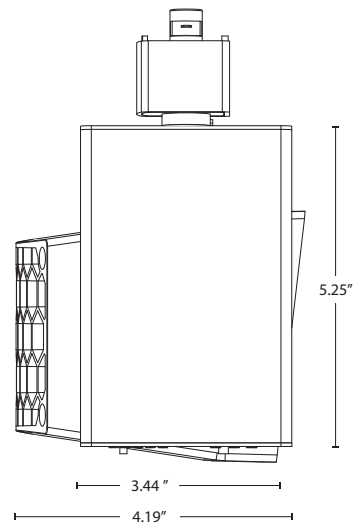

Weight: 2.74 Lbs

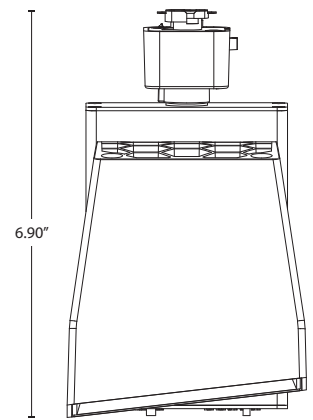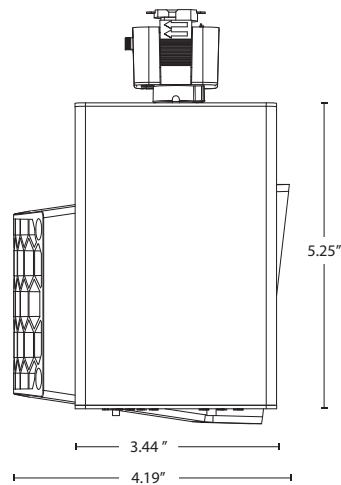


AIMING GUIDE

HIGH LUMEN SIDE MOUNT DRIVER SERIES — TH6001 / TH6002 / JH6001 / JH6002

L and W are the outer points where the candlepower drops to 50% of the maximum.

LX and FC are center-beam illuminance values. X is the horizontal offset of the beam center. Data shown is for the 3000K setting.

Data derived from independent LM-79 photometric (IES) testing.

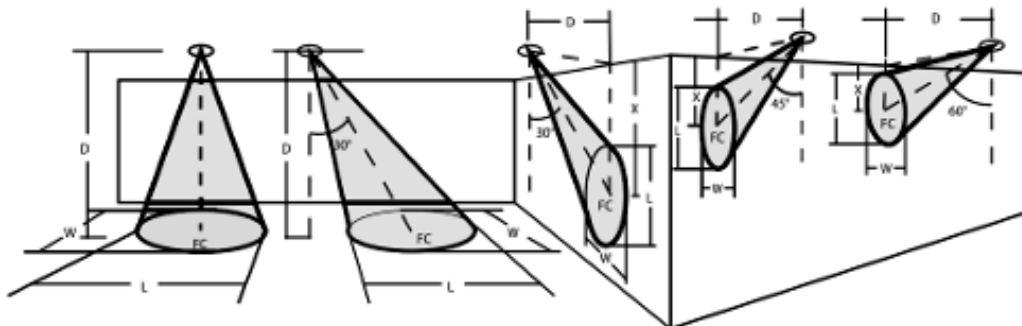

30W SETTING @3000K

40W SETTING @3000K

50W SETTING @3000K

Horizontal Aiming Angles	0°	30W SETTING @3000K						40W SETTING @3000K						50W SETTING @3000K								
		D	(ft)	LX	FC	L	W	D	(ft)	LX	FC	L	W	D	(ft)	LX	FC	L	W			
		6	6.00	1051.42	97.68	8.03	6.18	6	6.00	1327.31	123.31	7.78	6.66	6	6.00	1591.18	147.83	7.91	5.66			
		8	8.00	591.43	54.95	10.70	8.23	8	8.00	746.61	69.36	10.38	8.88	8	8.00	895.04	83.15	10.54	7.55			
		10	10.00	378.51	35.17	13.38	10.29	10	10.00	477.83	44.39	12.97	11.10	10	10.00	572.82	53.22	13.18	9.44			
		12	12.00	262.86	24.42	16.05	12.35	12	12.00	331.83	30.83	15.57	13.32	12	12.00	397.79	36.96	15.81	11.32			
		14	14.00	193.12	17.94	18.73	14.41	14	14.00	243.79	22.65	18.16	15.53	14	14.00	292.26	27.15	18.45	13.21			
Vertical Aiming Angles	30°	30W SETTING @3000K						40W SETTING @3000K						50W SETTING @3000K								
		D	(ft)	LX	FC	X	L	W	D	(ft)	LX	FC	X	L	W	D	(ft)	LX	FC	X	L	W
		6	6.93	682.92	63.45	3.46	9.27	6.18	6	6.93	862.11	80.09	3.46	8.99	6.66	6	6.93	1033.50	96.02	3.46	9.13	5.66
		8	9.24	384.14	35.69	4.62	12.36	8.23	8	9.24	484.94	45.05	4.62	11.99	8.88	8	9.24	581.34	54.01	4.62	12.17	7.55
		10	11.55	245.85	22.84	5.77	15.45	10.29	10	11.55	310.36	28.83	5.77	14.98	11.10	10	11.55	372.06	34.57	5.77	15.22	9.44
		12	13.86	170.73	15.86	6.93	18.53	12.35	12	13.86	215.53	20.02	6.93	17.98	13.32	12	13.86	258.37	24.00	6.93	18.26	11.32
		14	16.17	125.43	11.65	8.08	21.62	14.41	14	16.17	158.35	14.71	8.08	20.97	15.53	14	16.17	189.83	17.64	8.08	21.30	13.21


IES-verified at 3000K (TH6002/JH6002): 30W 67.5° × 54.5° | 40W 65.9° × 58.0° | 50W 66.8° × 50.5°. LX includes inverse-square loss and target-plane cosine correction; FC = LX × 10.7639.

SATCO | TH6001 · TH6002 · JH6001 · JH6002 | Contact your Satco sales representative for pricing & availability | satco.com

OPTIONAL ACCESSORIES

Item	Description	Finish	Length	Width	Height	Certification
TR118	2 Foot Track, 2 dead end caps, all mounting hardware	White	24"	1 5/16"	5/8"	Dry
TR119	2 Foot Track, 2 dead end caps, all mounting hardware	Black	24"	1 5/16"	5/8"	Dry
TR120	4 Foot Track, 2 dead end caps, all mounting hardware	White	48"	1 5/16"	5/8"	Dry
TR121	4 Foot Track, 2 dead end caps, all mounting hardware	Black	48"	1 5/16"	5/8"	Dry
TR122	8 Foot Track, 2 dead end caps, all mounting hardware	White	96"	1 5/16"	5/8"	Dry
TR123	8 Foot Track, 2 dead end caps, all mounting hardware	Black	96"	1 5/16"	5/8"	Dry
TR124	6 Foot Track, 2 dead end caps, all mounting hardware	White	72"	1 5/16"	5/8"	Dry
TR125	6 Foot Track, 2 dead end caps, all mounting hardware	Black	72"	1 5/16"	5/8"	Dry
TR126	2 Foot Track, 2 dead end caps, all mounting hardware	Brushed Nickel	24"	1 5/16"	5/8"	Dry
TR127	4 Foot Track, 2 dead end caps, all mounting hardware	Brushed Nickel	48"	1 5/16"	5/8"	Dry
TR128	6 Foot Track, 2 dead end caps, all mounting hardware	Brushed Nickel	72"	1 5/16"	5/8"	Dry
TR129	8 Foot Track, 2 dead end caps, all mounting hardware	Brushed Nickel	96"	1 5/16"	5/8"	Dry
TR131	2 Foot Track, 2 dead end caps, all mounting hardware	Russet Bronze	24"	1 5/16"	5/8"	Dry
TR132	4 Foot Track, 2 dead end caps, all mounting hardware	Russet Bronze	48"	1 5/16"	5/8"	Dry
TR133	6 Foot Track, 2 dead end caps, all mounting hardware	Russet Bronze	72"	1 5/16"	5/8"	Dry
TR134	8 Foot Track, 2 dead end caps, all mounting hardware	Russet Bronze	96"	1 5/16"	5/8"	Dry
TP185	Drop Ceiling T-Bar Clips, for attaching Track Lighting to Drop Ceilings; 4 pc.	Metal Plain	11 1/2"	1/2"	7/8"	Dry


Tracks Includes two dead end caps and all mounting hardware.




White



Black



Brushed Nickel



Russet Bronze



Used with
3 Conductor "H"
type connector



Track with end
cap removed

Item	Description	Finish	Length	Width	Height	Certification
TP247	Single Monopoint Adapter; Round	Black	4 3/4"	4 3/4"	1"	Dry
TP248	Single Monopoint Adapter; Round	White	4 3/4"	4 3/4"	1"	Dry



TP247



TP248