Operation manual
11"14"LED Flush mount light
Models :62/795,62/796,62/797,62/798

With Integrated Dimmable Driver



Thank you for purchasing our product. This fixture has been manufactured from components with advanced optoelectronics to ensure high reliability and long life. Before assembling please read this Operation Manual carefully and save in a safe place for future reference. Please note that all electrical connections must be in accordance with local and National Electrical Code standards as well as local building codes. In case you are not familiar with proper wiring connections and building codes, consult a qualified electrician.

Safety recommendations

1. RISK OF ELECTRIC SHOCK – THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH MENTIONED ABOVE CODES AND HAZARDS INVOLVED. DISCONNECT POWER AT CIRCUIT BREAKER OR FUSE BEFORE INSTALLING OR SERVICING.
2. Before use of the product carefully read the whole Operation Manual.
3. THE PRODUCT IS PURPOSED FOR INTERIOR USE ONLY, SUITABLE FOR DAMP LOCATIONS.
4. Protect the product against direct contact with water.
5. Assemble the product only with the use of parts provided and the housing; improper assembly may result in device failing which could damage the product, personal property or cause injury.
6. Assembly shall follow with accessories delivered with the set only.
7. The device is not a toy, KEEP OUT OF REACH OF CHILDREN.

Specifcations:

Models: 62/795,62/796,62/797,62/798
Operating Voltage:120/277 VAC
Dimming: 120V Triac only
Power consumption: 12.5W/16.5W/17.5W
Color Temp.: 2700K/3000K/4000K/5000K
Life span: 40,000h
Illumination authorization<5%
per 10,000h

Copyright © 2016
Satco Products, Inc.
All Rights Reserved.

National Toll-Free:
800-43-SATCO
(800-437-2826)
www. nuvolighting. com

Distribution Centers:
New York, Florida,
Texas, Washington,
California, Puerto Rico

Satco Products Inc.
110 Heartland Blvd.,
Brentwood, NY 11717
PH 631-243-2022
FX 631-243-2027



Step 1.

Attach installation bracket to junction box by two screws (provided)

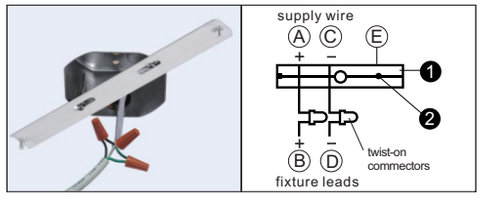

Step 2

1. Connect positive supply wire (A) (typically black or the smooth, unmarkedside of the two-conductor cord) to positive fixture lead (B) with appropriatelysized twist on connector - see Drawing.
2. Connect negative supply wire (C) (typically white or the ribbed, markedside of the two-conductor cord) to negative fixture lead (D).
3. For positive grounding in a 3-wire electrical system, fasten the fixture groundwire (E) (typically copper or green plastic coated) to the fixture mounting strap (1)with the ground screw (2) - see Drawing.



Step 3.

Attach base of fixture to mounting bracket using two nuts(provided)



Step 4.

Align slots on the cover with the tabs in the base and twist

Dimming

This product is compatible with most residential type dimmers available on the market. The dimming performance will depend on kind of dimmer and dimmer settings. Visit Satco.com for an up to date list of compatible dimmers.

Cleaning

- Clean with a soft or damp cloth. While cleaning with the damp cloth make sure the power is of.
- Do not clean with liquids or abrasives.

5 Year limited warranty

The purchased product is covered with a 5 year warranty in respect of any defect in material or workmanship after purchase date.

Satco shall bear no responsibility on account of guarantee, as well as shall bear no liability for any faults, in case of improper operation, use negligence, accident or exposure to natural hazard, or excessive use over the limits specifed for the unit, or if any unauthorized alteration or repair followed.